


Oil - Fix® H2

BIO~oil- & chemical-absorbent

based on the expanded mineral perlite

- 1 fibre free
- 2 non toxic
- 3 natural
- 4 ecological

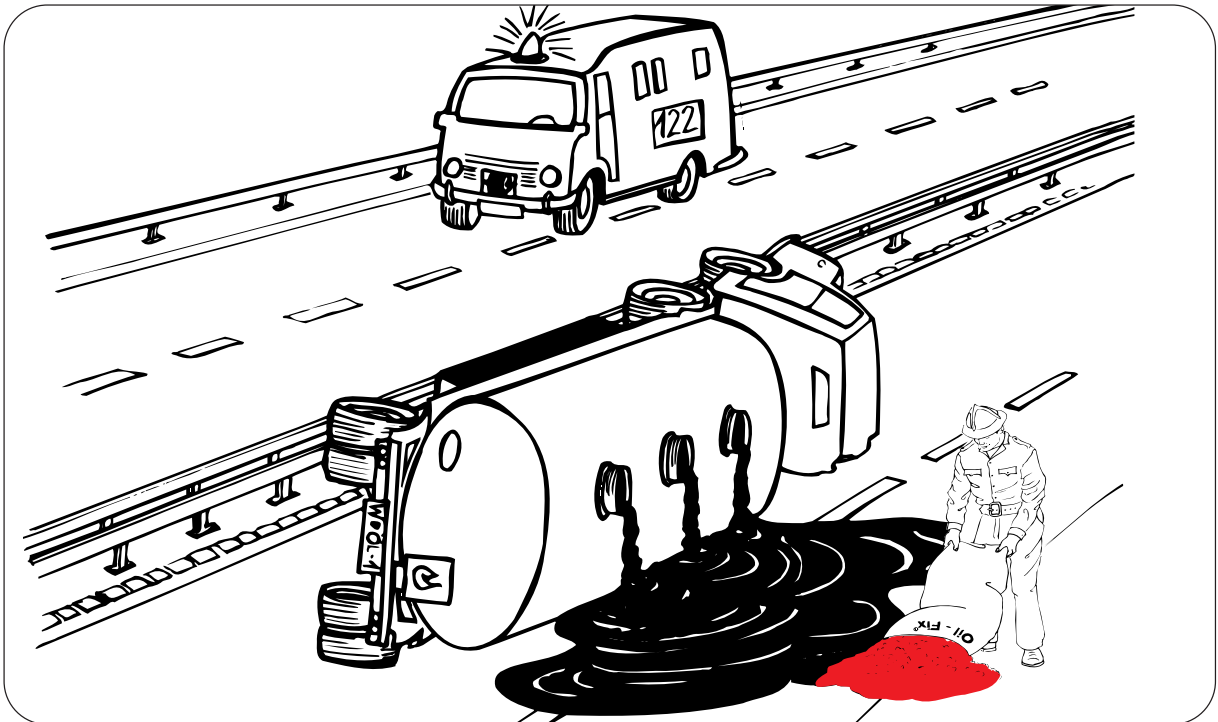

- ✓ resistant to wind
- ✓ resistant to heat & chemicals
- ✓ non slippery
- ✓ disposable (compost aid, thermic & bacteriological oil-separation possible)
- ✓ dust free
- ✓ capillar absorption (really soaked up – not just surface bounded)
- ✓ also for preventive use (e.g. protection of ground water)

Tested by fire brigade school Tulln: "Oil-Fix® exceeded the expectations by far".

technical details of Oil-Fix® H2

<p>type: environmental-<i>e</i>uroperl® Type B2</p> <p>usage: oil- & chemical-binder to be used in- & outdoor, on land areas</p> <p>in case of increased exposure to dust or wind</p> <p>grain: < 7 mm</p> <p>weight: appr. 650 kg/m³</p> <p>absorption: 0,4-1 l oil per 1 l Oil-Fix</p>	<p>highly absorbent, weight increased, treated, oilbinder Type III</p> <p>combustion: A1, unburnable</p> <p>usage temperature: sinters at 800°C, melts at 1.200°C</p> <p>inorganic: non rotting, bug-safe</p> <p>ph-neutral: chemical- & corrosion-neutral</p> <p>disposal: natural product - no restriction</p> <p>delivery: reusable PE-bags 15 l</p> <p>weight of bag: approx. 10 kg</p> <p>efficiency: 1 bag for approx. 6 -15 l oil</p>
---	---